

Trimec-FP TF-Series Large Capacity Electronic Flowmeters

Volumetric flow measurement of clean liquids or low flows used in receipt verification, loading, unloading and distribution management at petroleum plants, mine sites, marine and aviation facilities. For pumped or gravity fed distribution of fuels, fuel oils, lubricants, alcohols and solvents.

Features / Benefits

- High accuracy and repeatability, direct volumetric reading
- No requirement for flow conditioning (straight pipe runs)
- Measures high and low viscosity liquids
- Quadrature pulse output option and bi-directional flow
- Only two moving parts

General Specifications

- Flow Rates: 35 - 1500 L/min [10 - 400 USG/min] *
 - Sizes: 3" - 4" [80mm - 100mm]
 - Materials: Aluminium, 316 Stainless steel (080 only)
- * See also Small and Medium Capacity data sheets for other size meters



Meter Selection

- Aluminium meters for petroleum products (oils and grease, fuels and fuel oils)
- Stainless steel meters for the chemical, cosmetic, food and pharmaceutical industries (water based liquids)
- Blind pulse meters available with reed switch and Hall Effect outputs. Optional Quadrature pulse and Integral 4-20mA outputs available

Integral Instruments

Options include integral LCD totalisers, flow rate totalisers and batch controllers (4-20mA, scaled pulse, alarms and batch control)


- BT11 LCD 5-digit reset, 8-digit cumulative totaliser
- RT14 LCD 6-digit reset, cumulative totaliser and flow rate, analogue and pulse outputs
- RT14 LCD 8-digit reset, cumulative totaliser, analogue and pulse outputs with backlit display
- EB10 LCD 6-digit 2 stage batcher and cumulative totaliser
(Available for remote mounting and with I.S. approvals)

Model Specifications

Model	TF080	TF080E	TF100
Nominal Size	80mm (3")	80mm (3")	100mm (4")
* Nominal Flow range @ 3cP	35 - 750 L/min (10 - 200 USG/min)	50 - 1000 L/min (13 - 260 USG/min)	75 - 1500 L/min (20 - 400 USG/min)
Accuracy	± 0.5% of reading (± 0.2% of reading with optional RT12 /RT14)		
Repeatability	Typically ± 0.03% of reading		
Ambient Temperature Range (AL and SS meters)	-40°C to +120°C (-40°F to +250°F)		
Max. Pressure (AL meters)	12 Bar (175 psi)	12 Bar (175 psi)	10 Bar (145 psi)
Max. Pressure (SS meters)	12 Bar (175 psi)	n/a	n/a
Protection Class	IP66/67 (NEMA4XI, Integral ancillaries can be supplied intrinsically safe [I.S])		
Recommended Filtration	40 mesh (350 microns)		
Output Pulse Resolution - Pulses per Litre (Pulses per USG) - Nominal			
Reed Switch	2.65 (10.0)	1.55 (5.68)	1.10 (4.15)
Hall Effect	10.7 (40.5)	6.00 (22.7)	4.40 (8.30)
QP (Quadrature) Hall Effect	5.33 (20.0)	3.00 (11.4)	2.20 (4.15)
Reed Switch Output	30Vdc x 200mA max. (maximum thermal shock 10°C [18°F]/ minute)		
Hall Effect Output	3 wire open collector, 5 - 24 Vdc max, 20mA max		
Optional Outputs	4-20mA, Scaled pulse, Quadrature pulse, flow alarms or two stage batch control		

* Maximum flow reduces as viscosity increases, see flow de-rating guide.

Max recommended pressure drop 1 Bar (14.5 psi)

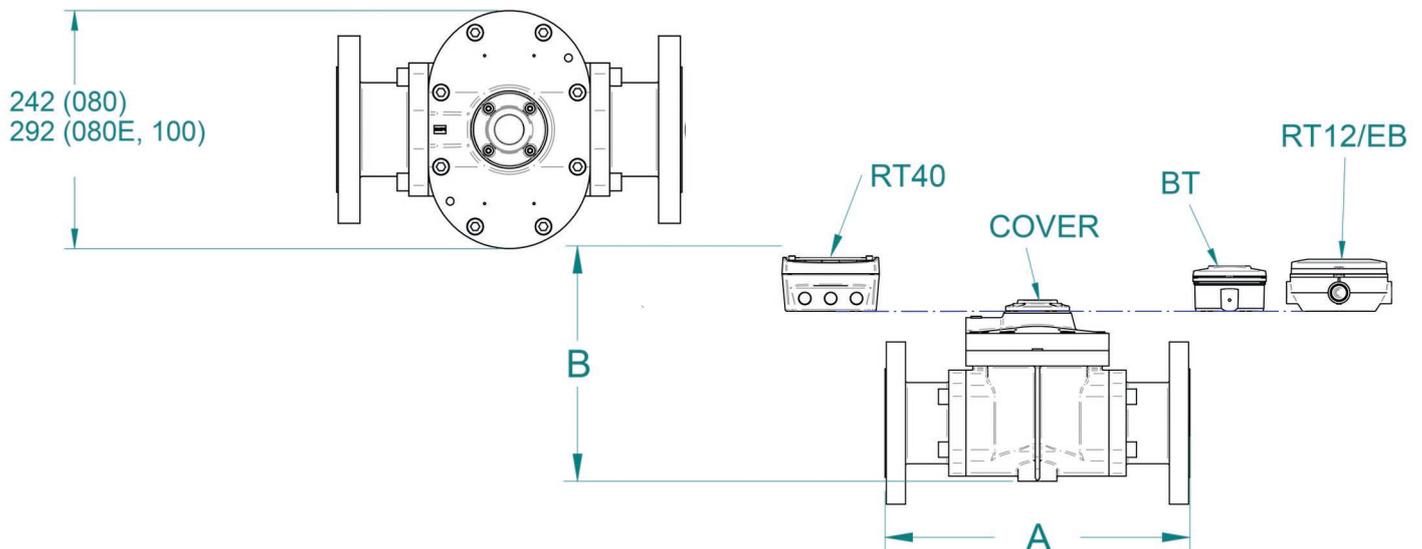

Dimensions (± 2mm)

Modular Fitting	A			Configuration	B			
	TF080	TF080E	TF100		TF080A	TF080S	TF080E	TF100
Flanged	354	382	388	EB10 / RT12 / RT14 GRN housing	260	257	277	322
				BT11	252	259	269	314
Threaded	266	294	294	RT40	264	260	281	326
				Cover	213	206	229	274

Model Specifications

TF080	80mm	(3")	35 - 750 L/min (10 - 200 uSG/min)
TF080E	Extended flow		50 - 1000 L/min (13 - 260 uSG/min)
	80mm	(3")	
TF100	100mm	(4")	75 - 1500 L/min (20 - 400 USG/min)
Body Material			
A	Aluminium		
E	Extended flow aluminium		
S	316 Stainless steel (TF080 only)		
Rotor Material / Bearing type			
0	0	PPS (008 only) (not available for 150°C meters) / No bearing	
1	0	Keishi cut PPS (for high viscosity liquids)(not available for 150°C meters) / No bearings	
O-ring Material			
1	Viton (-15°C min[-5°F])		
3	Teflon Encapsulated Viton (includes KALREZ shaft seals) (-15°C min [5°F])		
4	Nitrile (-40°C [-40°F])		
Temperature Limits			
-	2	120°C [250°C] max	
-	3	150°C [300°F] max. (Hall only) (includes SS terminal cover)	
-	5	*120°C [250°F] max. (includes cooling fin)	
-	8	# 80°C [176°F] max. (meters with integral instruments, TF008 with PPS rotors)	
Process Connections			
0	No fittings (TF025 - TF050)		
1	BSPP (G) female threaded		
2	NPT female threaded		
4	ANSI - 150 RF flanged		
6	PN16 DIN flanged		
Cable Entries			
1	M20 x 1.5mm (M16 x 1.5 for R4 option)		
2	1/2"NPT Adaptor		
Integral Options			
-	NIL		
SS	Stainless Steel Terminal Cover		
RS	REED Switch Only - to suit Intrinsic Safe Installations		
QP	Quadrature pulse (2 NPN phased outputs)		
B2	*# BT11 totaliser with pulse output		
B3	*# BT11 intrinsically safe totaliser with pulse output		
R2	*# RT12 rate totaliser with all outputs (GRN housing)		
R3	*# RT12 intrinsically safe rate totaliser with all outputs (GRN housing)		
R4	*# RT40 backlit rate totaliser (alloy housing with facia protector)		
R5	*# RT14 backlit rate totaliser with all outputs (GRN housing)		
E0	*# EB10 batch controller		
With scaleable pulse output			
IECEX & ATEX approved			
Scaled pulse, alarms, & 4-20mA			
IECEX & ATEX approved			
Scaled pulse, backlighting			
Scaled pulse, alarms, 4-20mA & backlighting			
2 stage DC batcher & totaliser			

* Temperature code 5 required when operating temperature is between 80°C (180°F) and 120°C (250°F)

Temperature code 8 required for all integral instruments.

Model No. Example

TF080	S	0	0	1	-	8	1	1	R2
-------	---	---	---	---	---	---	---	---	----

Authorized Distributor

Accu-Flo 1-800-921-2228
www.accuflo.com